






Performance

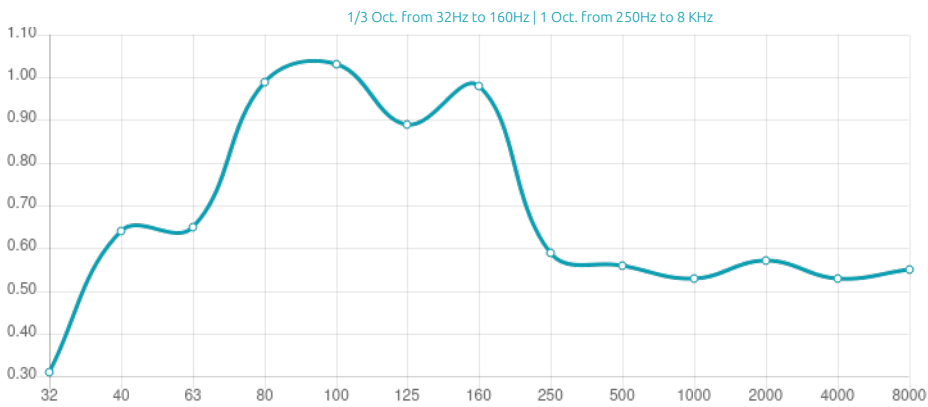

Technical Information

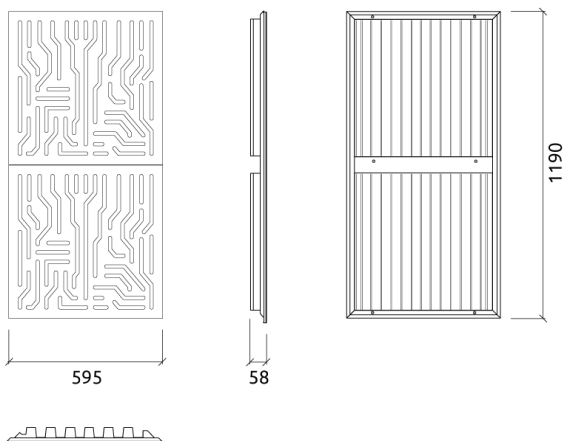

Features

Type:

Pistonic Diaphragmatic Absorber

Absorption range: 80 Hz to 120 Hz

Peak Absorption Frequency: 90 Hz

Material:

- Natural Wood veneer | Lacquered HMDF
- Marine grade plywood structural frame
- Calibrated cell acoustic foam

This panels can only be installed on vertical wall corners. Not for ceiling use.


Dimensions:

FG - LW | 595x1190x58mm | 8.06 Kg

FG - NW | 595x1190x58mm | 7.9 Kg

With a peak absorption from 80 Hz to 120 Hz, the Wall Bass Trap offers an enriched acoustic experience, helping to directly reduce standing waves. The various front designs available for the Wall Bass Trap allow you to create various artistic patterns when mounted on the side, back walls of your home cinema or living room. The wall Bass trap combine perfectly with our standard absorber range.

The Wall Bass Trap - 595 x 1190 - equivalent to 2 standard panels, is equipped with a double membrane surrounding a central acoustic core. This design allows for a larger membrane - lowering the resonant frequency, whilst increasing the volume of the inner air cavities - All to bring you the maximum performance in as least space as possible.



**Product finishes**

**(FG - LW) Lacquered Wood Finishes**



FG | (L01) Blanc



FG | (L02) Noir



FG | (L03) Rouge



FG | (L05) Silver



FG | (L06) Noir  
Vintage



FG | (L07) Graphite  
Black



FG | (L08) Rose Gold



FG | (L09) Classic  
Gold



FG | (L10) Bronze



FG | (L11) Raw White



FG | (L12) Raw Black

**(FG - NW) Natural Wood Finishes**



FG | (W01) Cerise



FG | (W02) Marron



FG | (W03) Wenge

**Purpose**

- Room mode control
- Bass ratio control
- Low frequency RT reduction
- Improving low frequency response
- Reducing low frequency time decay

**Recommended for**

- Vertical Wall
- Small Room Acoustics
- Acoustic pressure zones

**Fixing Systems**

Wall



+ FixArt - Tube